


## RVS kortschalmige ketting SL, volgens DIN766

Art. nr.	d mm	P mm	W1 mm
076603A4	3	16,0	4,8
076604A4	4	16,0	4,8
076605A4	5	18,5	6,0
076606A4	6	22,0	7,2
076608A4	8	24,0	9,6
076610A4	10	28,0	12,0


\*13 en 16 mm op aanvraag



## RVS langschalmige ketting LL, volgens DIN763

Art. nr.	d mm	P mm	W1 mm
076303A4	3	26,0	6,0
076304A4	4	32,0	8,0
076305A4	5	35,0	10,0
076306A4	6	42,0	12,0
076308A4	8	52,0	16,0
076310A4	10	65,0	20,0


\*13 en 16 mm op aanvraag

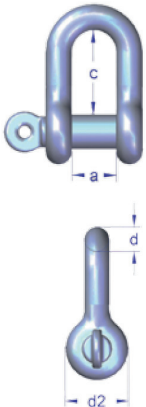

## RVS D-Sluiting

Art. nr.	d mm	a mm	c mm	d2 mm
309DS04A4	4	8	15	9
309DS05A4	5	10	17	10
309DS06A4	6	12	24	12
309DS08A4	8	16	30	16
309DS10A4	10	20	38	20
309DS12A4	12	26	50	24

\*16 mm op aanvraag

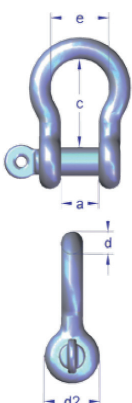

## RVS H-Sluiting

Art. nr.	d mm	a mm	c mm	e mm	d2 mm
309HS04A4	4	8	18	13	9
309HS05A4	5	10	18	15	10
309HS06A4	6	12	22	17	12
309HS08A4	8	16	30	23	16
309HS10A4	10	20	36	27	20
309HS12A4	12	26	47	37	24

\*16 en 19 mm op aanvraag